


Non-Standard 63mm commercial basement supply fronting on to the adopted highway with provision for 25mm - 40mm in-line meters

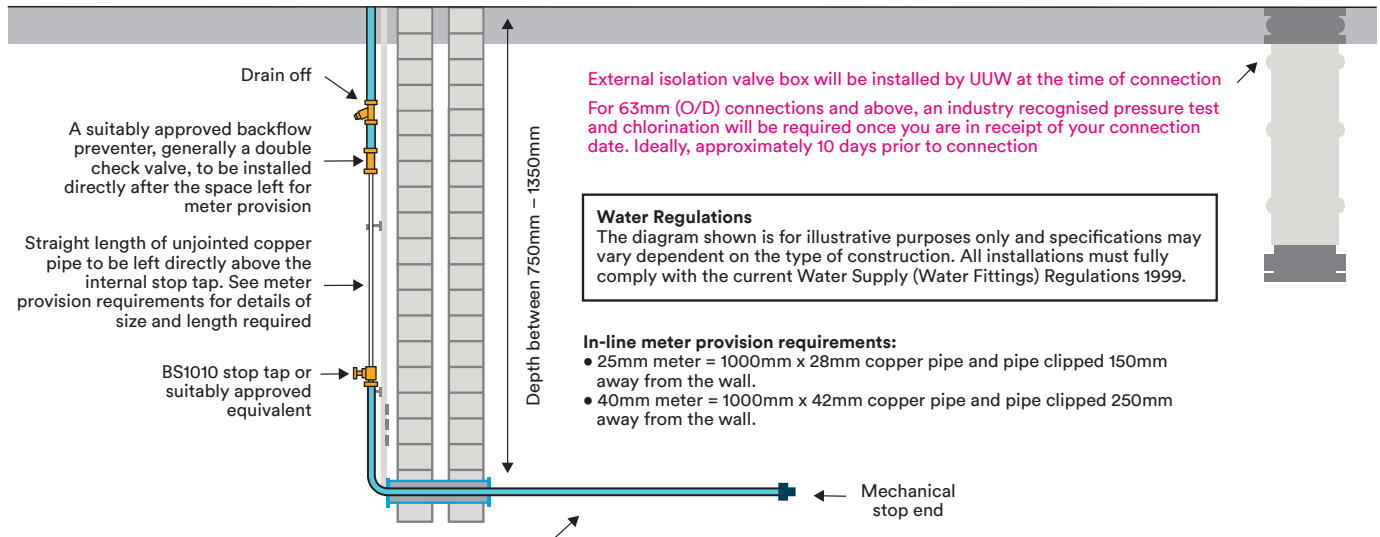

Core drill or break through basement wall (750mm from external ground level to top of pipe) without entering into the adopted highway and install duct. Duct to be sized to accommodate the service pipe with insulation (where applicable) that meets the minimum requirements. End of the pipe to be sealed with a mechanical stop end. Please be mindful of street furniture

Note: Someone will need to be on site to pass the pipework through the duct on the day of connection. Duct to be sealed afterwards.